


Icon Valves & Engineering Pvt. Ltd.


www.flushbottomvalve.net; fbv@ivevalves.com




FLUSH TANK BOTTOM VALVE ACTUATED FLANGE ENDS DISC LOWERING INTO THE VALVE-LONG HUB 150#

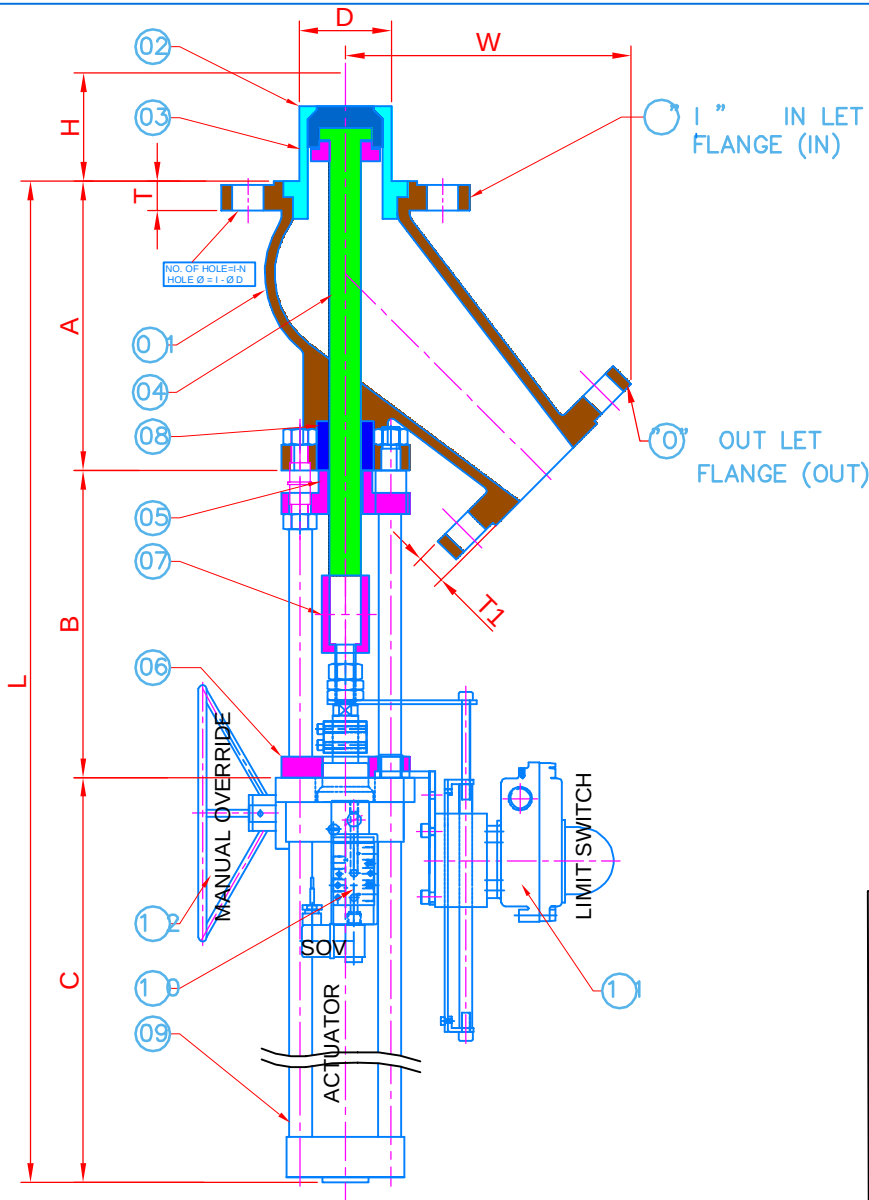

1/2" BSP
COUPLING
WITH PLUG



PROVISION FOR CLEANING NOZZLE



PROVISION RTD SENSOR



FLUSH TANK BOTTOM VALVE FLANGE END DISC OPENING INTO THE TANK 45° (DEGREE) WITH ACTUATOR														
SIZE (mm)		Approx. L = A+B+C	H	D	Approx.				(FLANGE DIMENSIONS)			(FLANGE DIMENSIONS)		APP. WT. / KG FOR VALVE ONLY
IN	OUT				W	A	B	C	I	T	O	T1		
3/4"	3/4"		↑ TO BE SPECIFIED BY CLIENT ↓	↑ TO BE SPECIFIED BY CLIENT ↓	122	108			AS PER 3/4" NB ASA 150#	11	AS PER 3/4" NB ASA 150#	11	06	
1"	3/4"				122	108				AS PER 1" NB ASA 150#	11	AS PER 3/4" NB ASA 150#	11	07
1"	1"				138	133				AS PER 1" NB ASA 150#	11	AS PER 1" NB ASA 150#	11	08
1.1/2"	1"				138	133				AS PER 1.1/2" NB ASA 150#	14	AS PER 1" NB ASA 150#	11	09
1.1/2"	1.1/2"				156	148				AS PER 1.1/2" NB ASA 150#	14	AS PER 1.1/2" NB ASA 150#	14	10
2"	1.1/2"				156	148				AS PER 2" NB ASA 150#	16	AS PER 1.1/2" NB ASA 150#	14	11
2"	2"				176	160				AS PER 2" NB ASA 150#	16	AS PER 2" NB ASA 150#	16	12
3"	2"				176	160				AS PER 3" NB ASA 150#	19	AS PER 2" NB ASA 150#	16	14
3"	3"				218	210				AS PER 3" NB ASA 150#	19	AS PER 3" NB ASA 150#	19	21
4"	3"				218	210				AS PER 4" NB ASA 150#	24	AS PER 3" NB ASA 150#	19	24
4"	4"				245	267				AS PER 4" NB ASA 150#	24	AS PER 4" NB ASA 150#	24	33
6"	4"				245	267				AS PER 6" NB ASA 150#	25	AS PER 4" NB ASA 150#	24	39
6"	6"				321	388				AS PER 6" NB ASA 150#	25	AS PER 6" NB ASA 150#	25	65
8"	6"				321	388				AS PER 8" NB ASA 150#	28	AS PER 6" NB ASA 150#	25	75
8"	8"				395	485				AS PER 8" NB ASA 150#	28	AS PER 8" NB ASA 150#	28	90

Sr No	DESCRIPTION	MATERIAL	QTY
01	BODY	ASTM A216 WCB, ASTM A351 / CF8 / CF8M / CF3 / CF3M / CN7M	1
02	DISC	ASTM A216 WCB, ASTM A351 / CF8 / CF8M / CF3 / CF3M / CN7M	1
03	SEAT	ASTM A216 WCB, ASTM A351 / CF8 / CF8M / CF3 / CF3M / CN7M	1
04	STEM	AISI 304/316/304L/316L/A20	1
05	GLAND	AISI 304	1
06	YOKE BUSH HOUSING	AISI 304	1
07	COUPLER	M.S. / SS304	1
08	GLAND PACKING	PTFE/GF/CF PTFE / GRAPHOIL	1
09	PNEUMATIC CYLINDER	ALUMINIUM DIE CAST BODY S / A OR D/A	1
10	LIMIT SWITCH	ALUMINIUM DIE CAST BODY	1
11	SOLENOID VALVE	ALUMINIUM DIE CAST BODY 3/2 WAY OR 5/2 WAY	1
12	MANUAL OVER RIDE	CI BODY	1

PRIMARY SERVICE RATING & TEST PRESSURE				
CLASS	WORKING PRESS.	HYD. TEST PRESSURE		
		BODY	SEAT	TEMP.
150	150 PSIG	425 PSIG	300 PSIG	38° C
AIR TEST - SEAT		80 PSIG ±10 PSIG		
TECHNICAL DATA				
DESIGN & MANUFACTURING STD.		MANUFACTURERS STD. / ANSI B-16.34		
TESTING & INSPECTION STD.		API 598		
END CONNECTIONS :		FLANGED AS PER ANSI B-16.5 CLASS-150#.		

NOTE: This Drawing, Catalogue, Photographs and Information there off are sole & Exclusive Property of "IVE". Icon Valves & Engineering Pvt. Ltd. Mumbai. It cannot be Copied, Distributed or Circulated to any other firm, Party or individual without written consent from us. We keep our rights reserved to make any changes time to time in technical specification & dimension without prior Notice. The dimensions, Drawing & Photographs illustrated are approximate & may some time differ from the actual product. Please ask for final Drawings & Photos against projects