
Icon Valves & Engineering Pvt. Ltd. www.ptfelinedproducts.com; ptfe@ivevalves.com

IN LET FLANGE (IN)

OUT LET FLANGE (OUT)



FEP / PFA LINED FLUSH TANK BOTTOM VALVE OPEN UP 150# CYLINDER OPT LONG HUB

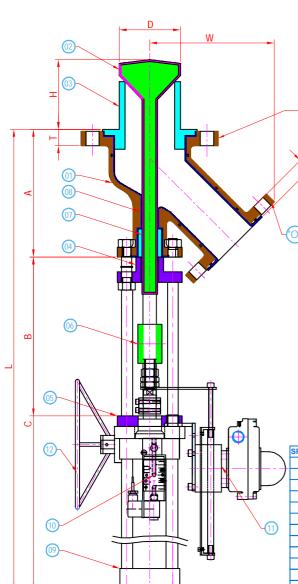

NOTE: This Drawing, Catalogue, Photograps & Information there off are sole & Excussive Property of TVE; Icon Valve & Engineering Pv. L.U. Mumbal. it cannot be Copied, Distributed or Circulated to any other firm. Party or Individual without prior Values without without prior Nations. The dimensions, Drawing & Photographs Illustrated are approximate & may some time differ from the actual product. Please ask for final Drawings & Photos against orders.




	SR NO.	DESCRIPTION	MATERIAL	QTY.
1	01	BODY	ASTM A216 WCB, ASTM A351 / CF8 / CF8M x FEP / PFA LINED	1
T	02	DISC & STEM	AISI SS 304 x FEP / PFA LINED	1
_	03	SEAT	PTFE / GLASS FILED PTFE	1
	04	GLAND	CS / CF 8	1
	05	MOUNTING PLATE	CS/ CF 8	1
	06	COUPLER	MS / SS	1
	07	GLAND PACKING	PTFE/GF/CF PTFE WITH PTFE ROPE	1
	08	LINING	3 TO 5MM - FEP OR PFA LINING	1
	09	PNEUMATIC CYLINDER	ALUMINIUM DIE CAST BODY S / A or D / A	1
	10	LIMIT SWITCH	ALUMINIUM DIE CAST BODY WITH DOME INDICATOR	1
	11	SOLENOID VALVE	ALUMINIUM DIE CAST BODY 3/2 / 5/2 WAY	1
	12	MANUAL OVER RIDE	CI BODY	1

PRIMARY	PRIMARY SERVICE RATING & TEST PRESSURE								
CLASS	WORKING	HYD. TEST PRESSURE							
	PRESS.	BODY	SEAT	TEMP.					
150	100 PSIG	225 PSIG	150 PSIG	150/200°C					
AIR TEST-	-SEAT 80 PSIG ±10 PSIG; SPARK TEST: 10 KVA								

<u>I</u>	ECHNICAL DATA
DESIGN & MANUFACTURING STD.	MANUFACTURER'S STD.
TESTING & INSPECTION STD.	API 598
END CONNECTIONS:	FLANGED AS PER ANSI B-16.5
STANDARD RESIN SPECIFICATION	PFA : ASTM D 3418 / FEP : ASTM D 2116

FLUSH TANK BOTTOM VALVE FLANGE END DISC OPENING INTO THE TANK CYLINDER ACTUATED LONG HUB																				
SIZE (mm)		Approx.	н		Approx	Approx.		ί.	(FLANGE DIMENSIONS)		(FLANGE DIMENSIONS)		WT. / KG.							
IN	OUT	L = A+B+C	н	ا تا	W	Α	В	С	I	Т	0	T1	FOR VALVE ONLY							
1.1/2"	1"		1	1	140	157	150		AS PER 1.1/2" NB ASA 150#	14	AS PER 1" NB ASA 150#	11	10							
2"	1.1/2"		i i		165	183	160		AS PER 2" NB ASA 150#	16	AS PER 1.1/2" NB ASA 150#	14	13							
3"	2"		180		SPECIFIED	176	203	175		AS PER 3" NB ASA 150#	19	AS PER 2" NB ASA 150#	16	16						
4"	3"		- BOB			210	210	200		AS PER 4" NB ASA 150#	24	AS PER 3" NB ASA 150#	19	22						
4"	2"		980			986	0.086	0.086	0.086	0.086	0.086.5	0.086	235	203	200		AS PER 4" NB ASA 150#	24	AS PER 2" NB ASA 150#	16
6"	4"		Ţ		260	260	225		AS PER 6" NB ASA 150#	25	AS PER 4" NB ASA 150#	24	38							



PROVISION RTD SENSOR