
## Icon Valves & Engineering Pvt. Ltd. www.flushbottomvalve.net; fbv@ivevalves.com







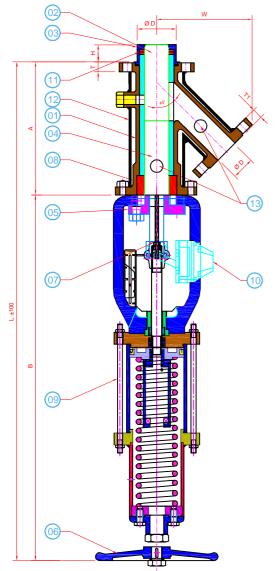

| JACKETTED FLUSH TANK BOTTOM VALVE ACTUATED FLANGE ENDS DISC OPENING INTO THE TANK |      |         |        |          |        |     |   |  |                        |    |                         |    |                   |
|---|------|---------|--------|----------|--------|-----|---|--|------------------------|----|-------------------------|----|-------------------|
| SIZE (mm)   |      | APPROX  |        |          | APPROX |     |   |  | (FLANGE DIMENSIONS)    |    | (FLANGE DIMENSIONS)     |    | APP. WT. / KG.    |
| IN  | OUT  | L = A+B | Н      | D        | W      | Α   | В |  | I                      | Т  | 0                       | T1 | FOR VALVE<br>ONLY |
| 1.5"  | 1"   |         | JENT   | T,       | 138    | 277 |   |  | AS PER 1.5" NB ASA150# | 14 | AS PER 1" NB ASA150#    | 14 | 11                |
| 2"  | 1.5" |         | BYCUE  | Y CLIE   | 187    | 225 |   |  | AS PER 2" NB ASA 150#  | 19 | AS PER 1.5" NB ASA 150# | 14 | 14                |
| 3"  | 2"   |         | CIFIED | CIFIED B | 197    | 277 |   |  | AS PER 3" NB ASA 150#  | 24 | AS PER 2" NB ASA 150#   | 19 | 27                |
| 4"  | 3"   |         | E SPE  | E SPEC   | 250    | 300 |   |  | AS PER 4" NB ASA 150#  | 24 | AS PER 3" NB ASA 150#   | 24 | 38                |
| 6"  | 4"   |         | 108    | 10 8     | 280    | 400 |   |  | AS PER 6" NB ASA 150#  | 26 | AS PER 4" NB ASA 150#   | 24 | 70                |

| SR.<br>NO. | DESCRIPTION          |   | MATERIAL  |
|------------|----------------------|---|---|
| 1          | BODY                 | 1 | ASTM A 351 Gr CF8M / CF8 / WCB                      |
| 2          | RAM                  | 1 | AISI S S 316 / 304                                  |
| 3          | SEAT                 | 1 | AISI S S 316 / 304                                  |
| 4          | STEM                 | 1 | AISI S S 316 / 304                                  |
| 5          | GLAND                | 1 | S S 316 / 304 / CF8                                 |
| 6          | MANUAL OVER RIDE     | 1 | CS BODY   |
| 7          | COUPLER              | 1 | AISI SS 304   |
| 8          | GLAND PACKING        | 1 | VIRGIN PTFE   |
| 9          | CYLINDER<br>ACTUATOR | 1 | CARBON STEEL BODY , SPRING RETURN                   |
| 10         | LIMIT SWITCH         | 1 | ALUMINIUM BODY, WITH DOME INDICATOR EXPLOSION PROOF |
| 11         | VALVE SEAT           | 2 | PTFE  |
| 12         | JACKET               | 1 | SS/MS   |
| 13         | JACKET COUPLING      | 2 | SS/MS   |

|         | PRIMARY SERVICE RATING & TEST PRESSURE |                    |          |       |  |  |  |  |
|---------|--|--------------------|----------|-------|--|--|--|--|
| CLASS   | WORKING                                | HYD. TEST PRESSURE |          |       |  |  |  |  |
|         | PRESS.                                 | BODY               | SEAT     | TEMP. |  |  |  |  |
| 150     | 42 PSIG                                | 425 PSIG           | 100 PSIG | 38° C |  |  |  |  |
| AIR TES | ST - SEAT                              | 80 PSIG ±10 PSIG   |          |       |  |  |  |  |

| TECHNICAL DATA              |  |  |  |  |  |  |
|-----------------------------|--|--|--|--|--|--|
| DESIGN & MANUFACTURING STD. | MANUFACTURERS STD. / ANSI B-16.34      |  |  |  |  |  |
| TESTING & INSPECTION STD.   | API 598                                |  |  |  |  |  |
| END CONNECTIONS             | FLANGED AS PER ANSI B-16.5 CLASS-150#. |  |  |  |  |  |